

Wind safety has never been so simple.



WR3-B Wireless Anemometers

Wind safety meets effortless efficiency.

Wind safety shouldn't be complicated.

Understand your site's wind conditions instantly with the WR3-B Wind Safety System. This wireless system is completely portable thanks to its optional magnetic bracket, allowing you to receive real-time wind and temperature data anywhere.

The shock resistant display unit has a range of up to 400 metres, and is ideal for sites where smartphone use is restricted or where you do not want to use your smartphone as the display.



FEATURES

- Rapid install with optional self-leveling magnetic bracket
- Completely transferable between sites
- Range up to 400 metres
- Shock resistant wireless display unit
- Data refresh every 2 seconds
- Wind tunnel calibrated sensors with precision stainless steel ball bearing and replaceable cups
- Displays wind speed and temperature, as well as a Beaufort Bar Graph
- Programmable wind speed alarm

AVAILABLE UPGRADES:

- Self-levelling bracket with optional magnetic mounting kit
- Waterproof, impact resistant carrying case for storage



Bigfoot Crane Company

TSBC License #: LED0205236

www.bigfootcrane.com

info@bigfootcrane.com



**Supply & Service
Across North America**

Wind safety has never been so simple.



Wind Sensor Specifications



WIND SPEED SENSOR

WIND SPEED MEASUREMENT RANGE	0.6 - 50 m/s
TEMP MEASUREMENT RANGE	-30°C - 60°C
WIND SPEED RESOLUTION	0.1 m/s
ACCURACY WIND SPEED	+/- 3%
ACCURACY TEMP	+/- 1%
CUP MATERIALS (REPLACEABLE)	PA (Polyamide)

GENERAL

DATA TRANSMISSION RATE	Every 2 seconds
BATTERY (INCLUDED)	3.6 V AA Lithium Battery
BEARINGS (X2)	Precision SS ball bearings
DIMENSIONS	210 mm Height
MOUNTING PIPE	20 mm Diameter
BATTERY LIFE	Up to 2 years

FIVE-SECOND INSTALL PROCESS

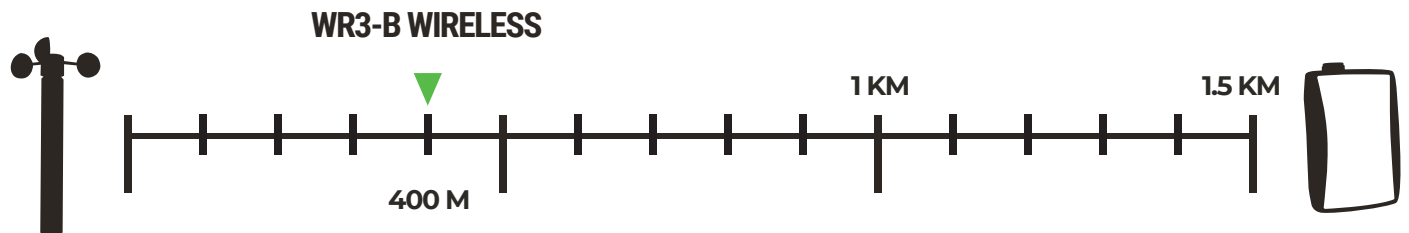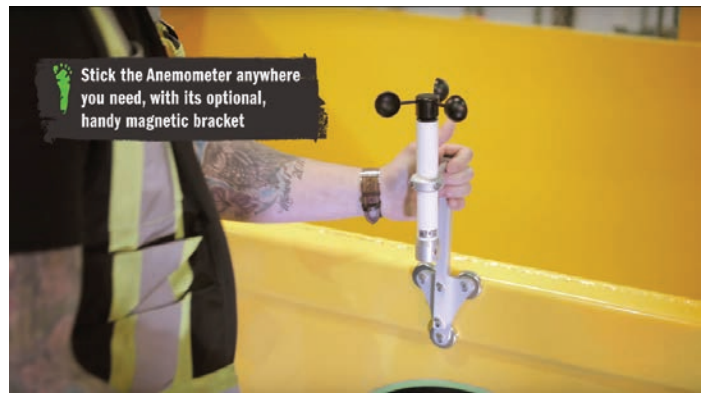

Bigfoot Crane Company
TSBC License #: LED0205236
www.bigfootcrane.com
info@bigfootcrane.com



Call Toll Free
1-855-598-3915

TALK TO AN EXPERT